




DUOCORE LIGHTWEIGHT TIMBER DOOR CORES

Duocore 44mm FD30

Duocore is the lightest weight solid timber blank available, with proven class-leading thermal insulation and UKAS certified hot plate test evidence for superior performance. multi-layered door blank with a light hardwood core. It can be freely resized to accommodate any leaf dimension, without the need for a timber perimeter.

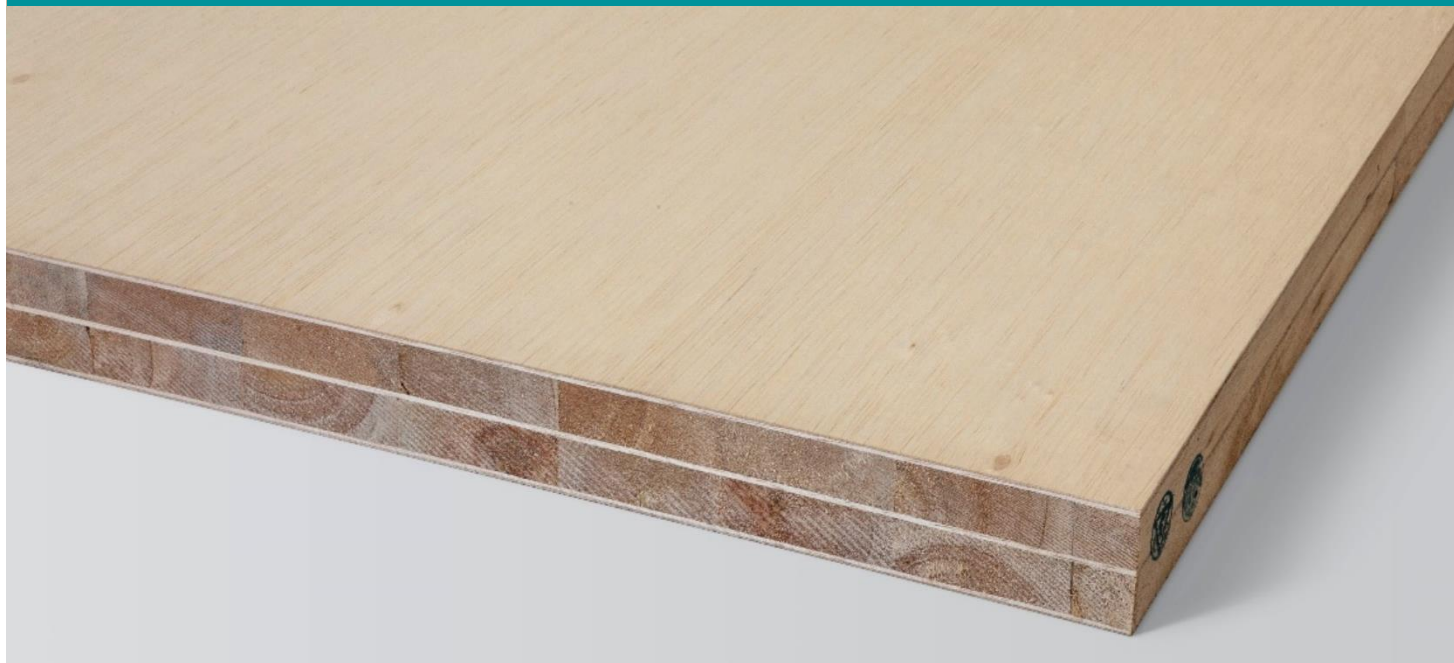

- Multi-layered light hardwood core for strength and stability
- Comprehensively Fire Tested to BS476:Pt 22 and BS EN 1634-1
- Ultra-lightweight - only 28kg for size 44mm 2135x915
- Can be manufactured to incorporate various door designs and configurations
- Exceptional thermal efficiency

PERFORMANCE SUMMARY

Core Variant	Composition			Thickness (mm)				Fire				App.		Max db(Rw)	PAS24 Security	Thermal Range	Certification			COC			Perimeter Framing	Recessed Panels	SCAN HERE		
	Particleboard	Solid Timber	Specialist	35	44	54	57	FD30	FD60	FD90	FD120	Internal	External				Certifire	Q Mark	IFCC	FSC	PEFC	EUTR				DD171/BS EN 1192	BS EN 13986
44		✓			✓			✓				✓	✓	33				✓				✓		E1			

* if specified at point of order

DUOCORE 44

30 Minutes Fire Performance – Q Mark

Config	Leaf Sizes				Seal Arrangement			Doc Link
	Max Height	At Width	Max Width	At Height	Jamb	Head	M/S	
LSASD	2839mm	1100mm	1356mm	2305mm	1 No 20x4	1 No 20x4	-	Chilt/A12296
ULSASD	2842mm	1100mm	1356mm	2305mm	1 No 20x4	1 No 20x4	-	Chilt/A12296
LSADD	2556mm	995mm	1045mm	2445mm	1 No 15x4	1 No 15x4	2 No 10x4	Chilt/A12296
ULSADD	2506mm	995mm	1020mm	2445mm	1 No 15x4	1 No 15x4	2 No 10x4	Chilt/A12296

The above intumescent seal configurations are a summary of available performances only. Individual seal manufacturers may have carried out additional independent testing which they could make available to doorset providers.

Fire door evidence. Access all areas with wizardoorer.co.uk

Evaluate. Compare. Specify.

Developed by Falcon Panel Products, **Wizardoorer** is a new online resource to provide fire door specialists, manufacturers, installers, specifiers and architects with easy access to validated, independent, supportive fire rated and acoustic door evidence...



...just scan for free access

Contact us for more information



Gateshead Depot
Haydock Depot
High Wycombe Depot
Leeds Depot
Nottingham Depot
Tilbury Depot
West Bromwich Depot

T 0191 338 8208
T 01744 416 600
T 01494 291 777
T 0113 887 2222
T 0115 919 2000
T 01375 487 300
T 0121 525 8844

E gateshead@falcon-timber.com
E haydock@falcon-timber.com
E highwycombe@falcon-timber.com
E leeds@falcon-timber.com
E nottingham@falcon-timber.com
E tilbury@falcon-timber.com
E westbrom@falcon-timber.com

E sales@falcon-timber.com
www.falcon-timber.co.uk

